

PRESIDENT

HENRY FCC

AM / FM
12V


6 COLOR RINGS



Engineered to be the very best

FEATURES

- LED display with display rings
- Key Beep/ Roger Beep
- 2 Emergency channels (EMG)
- Scan
- ANL/NB / Accessory volume
- LOCK
- Microphone Up/Down Activate/Deactivate
- Supplied accessories:
 - 1 Electret microphone
 - 1 Support
 - 1 Mounting cradle
 - Screws and fused power cord
 - 6 Interchangeable color rings

Art. N° TXUS166



*See warranty conditions on our website: www.president-electronics.us

Group
PRESIDENT
ELECTRONICS USA

2374/08-26

HEAD OFFICE: USA - 1007 Collier Center Way, Naples, Florida 34110
Web: <http://www.president-electronics.us> • Phone: +1 239.302.3100
Email: info@president-electronics.us

Compatible
BT MIKE
DIGIMIKE




6 COLOR RINGS




FCC





IC

- 1) ON/OFF ~ VOLUME
- 2) ASC (Automatic Squelch Control)
~ SQUELCH
- 3) DISPLAY
- 4) CHANNEL SELECTOR
- 5) SCAN
- 6) MODE
- 7) EMG ~ LOCK
- 8) ANL/NB
- 9) 6 PIN MICROPHONE PLUG
- 10) PTT (Push To Talk)

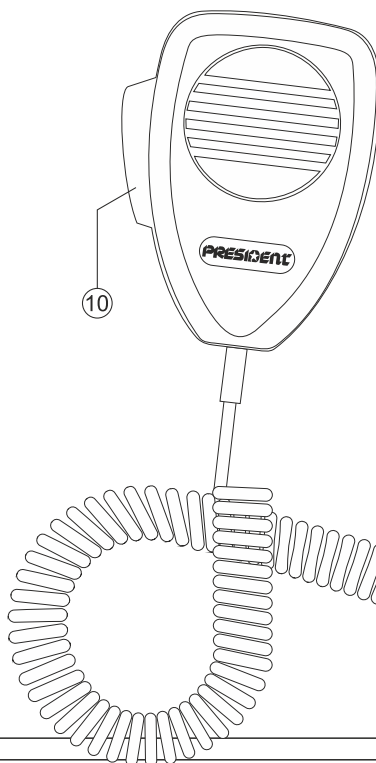

- A) DC-POWER TERMINAL
(13.8 V)
- B) ANTENNA CONNECTOR
(SO-239)
- C) JACK FOR EXTERNAL
OPTIONAL SPEAKER
(8 Ω, Ø 3.5 mm)

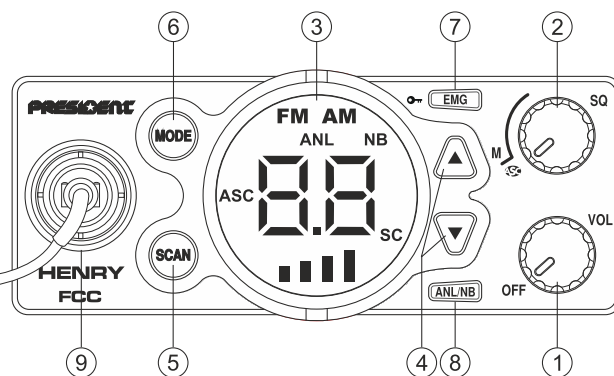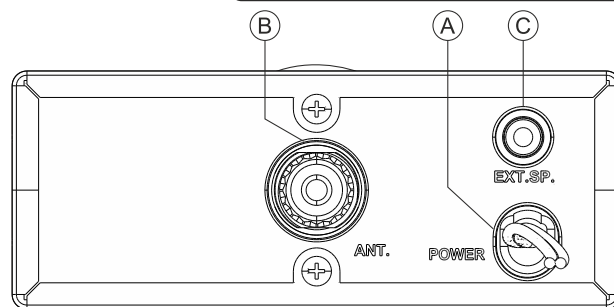

Specifications

1) GENERAL

- Channels : 40
- Modulation modes : AM / FM
- Frequency range : 26.965 MHz to 27.405 Mhz
- Antenna impedance : 50 ohms
- Power supply : 13.8 V
- Dimensions (in) : 4.53 (L) × 4.13 (D) × 1.77 (H)
- Weight : 0.93 lb
- Supplied accessories : Electret microphone with support, mounting cradle, screws and fused power cord, 6 color rings.

2) TRANSMISSION

- Frequency allowance : ± 200 Hz
- Carrier power : 4 W
- Transmission interference : < 4 nW (- 54 dBm)
- Audio response : 300 Hz to 3 KHz
- Emitted power in the adj. channel : < 20 μW
- Microphone sensitivity : 3.0 mV
- Max. drain : < 2A (13.8 V)
- Modul. signal distortion : < 5 %





3) RECEPTION

- Max. sensitivity at 20 dB sinad : 0.5 μV - 113 dBm (AM)
0.35 μV - 116 dBm (FM)
- Frequency response : 300 Hz to 3 kHz
- Adj. channel selectivity : 60 dB
- Max. audio power : 3 W
- Squelch sensitivity : min. 0.2 μV - 120 dBm
max. 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequency rejection rate : 70 dB
- Max. drain : 200~ 500 mA (13.8 V)

Art. N° TXUS166



3 143599 113060 34



Removing the display ring